



UPDATED
VERSION
NOV 2009

INSTALLATION INSTRUCTIONS WATERBRIDGE LAV DECK MOUNT - LEG EXTENSIONS

This Accessory allows the overall height of the faucet to be adjusted up to 2-1/2" depending on the vessel sink you are using it with.

Included in kit:

- Qty 2 - Leg Extensions**
- Qty 2 - 24" supply lines**

Supplies and tools needed:

- Soft cloth or towel**
- 7/16" Wrench**

Step 1:

Remove the brass retaining nut and trim ring from each leg.

Step 2:

Unscrew both legs from the "H-Body." Set aside on cloth so as not to scratch finish.

Step 3:

With the 7/16" Wrench, remove the 14" supply lines and set aside.





Step 4:

Install the new 24" supply lines that came with your kit. Hand tighten them first, then using the 7/16" wrench, tighten an additional 1/4 turn.

Step 5:

Re-install the legs into the "H-Body" by screwing them in clockwise.

Step 6:

Install the leg extensions onto the brass 'all-thread'.

NOTE:

This is where you will make the height adjustment according to local plumbing code and sink rim height (and/or personal taste).

Step 7:


Slip the trim rings back onto the 'all-thread' prior to placing into holes drilled in counter. Finger tighten the retaining nuts first.





Step 8:

Before tightening down fully, place a level across the handles and adjust the leg extensions as necessary to achieve a balanced height and ensure proper water flow.

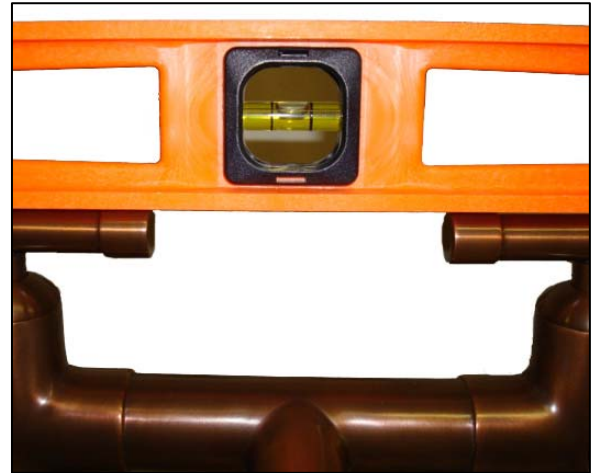

Step 9:

To complete the installation, tighten down the retaining nuts fully.

