




## PRODUCT SPECIFICATIONS

### **WATERBRIDGE FLOOR MOUNTED TUB FILLER w/"eLBOW" SPOUT - (LBO RTF FM)**

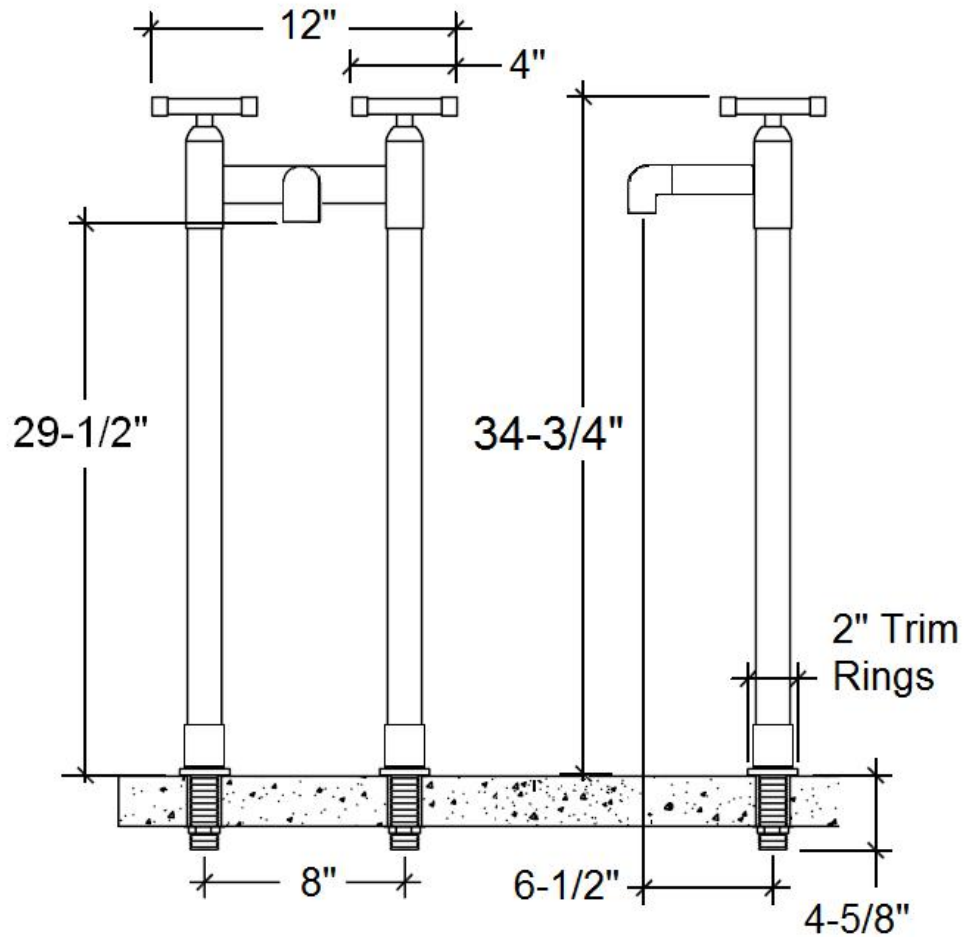

#### **FACTS**

3/4" Quarter-turn Ceramic Cartridges, 10-14 GPM (depending on water pressure)

Legs 8" on center (Leg on hot side is insulated)

3/4" NPS connection for mounting (1" O.D.) – compression fitting

Mounting holes should be drilled at 1-1/8" to 1-1/4" (2" Trim rings cover gaps)

IAPMO Approved

Optional Offset Lever Handles and Cross Handles Available

Custom Heights and Spout Lengths Available by Special Order

Stabilizer Tee available in matching finishes

Available in Four Standard Finishes (WaterBridge Collection)

Rustic Copper (RC) Oil Rubbed Bronze (ORB)


Rustic Nickel (RN) Pizzazz Nickel (PN)



UPDATED  
VERSION  
AUG 2011


## INSTALLATION DETAILS

### WATERBRIDGE "eLBOW" SPOUT TUB FILLER - FLOOR MOUNT (LBO RTF FM)

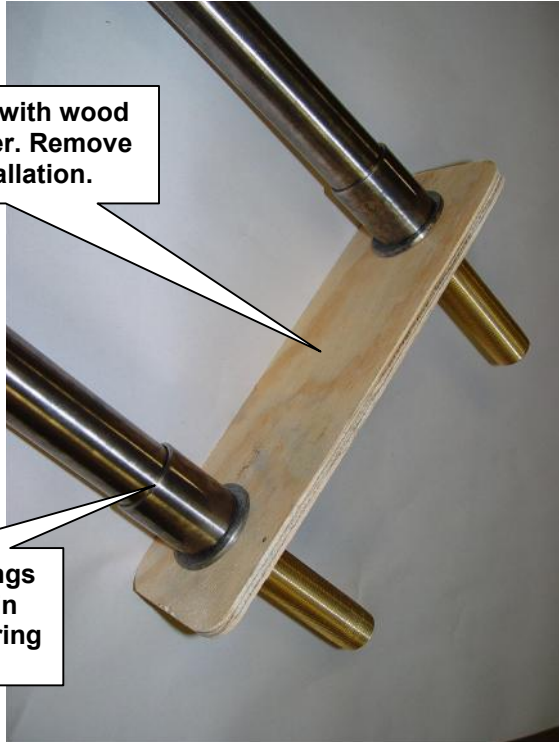

Legs shipped with wood or metal spacer. Remove before installation.

Shipped with o-rings to keep sleeves in place. Remove during installation.

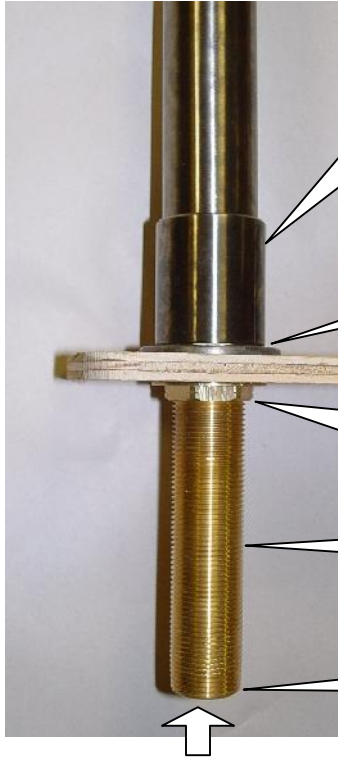

Leg Trim Sleeve  
(Hides Compression Nut)

2" Trim Ring  
(Hides hole through floor)


Retaining Nut  
(Optional - Holds Faucet tight against floor)

3/4" Nipple

Water Supply



3/4" Nipple should be installed exactly 5/8" above finished floor for optimum compression seal

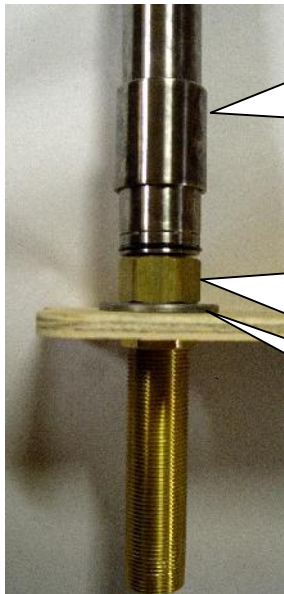

Lift Trim Sleeve to expose compression fitting nut

Tighten down compression fitting locking nut - then slide Trim Sleeve down to hide nut

Trim Ring