




PRODUCT SPECIFICATIONS

WATERBRIDGE ROMAN TUB FILLER – FLOOR MOUNT (WB RTF FM)

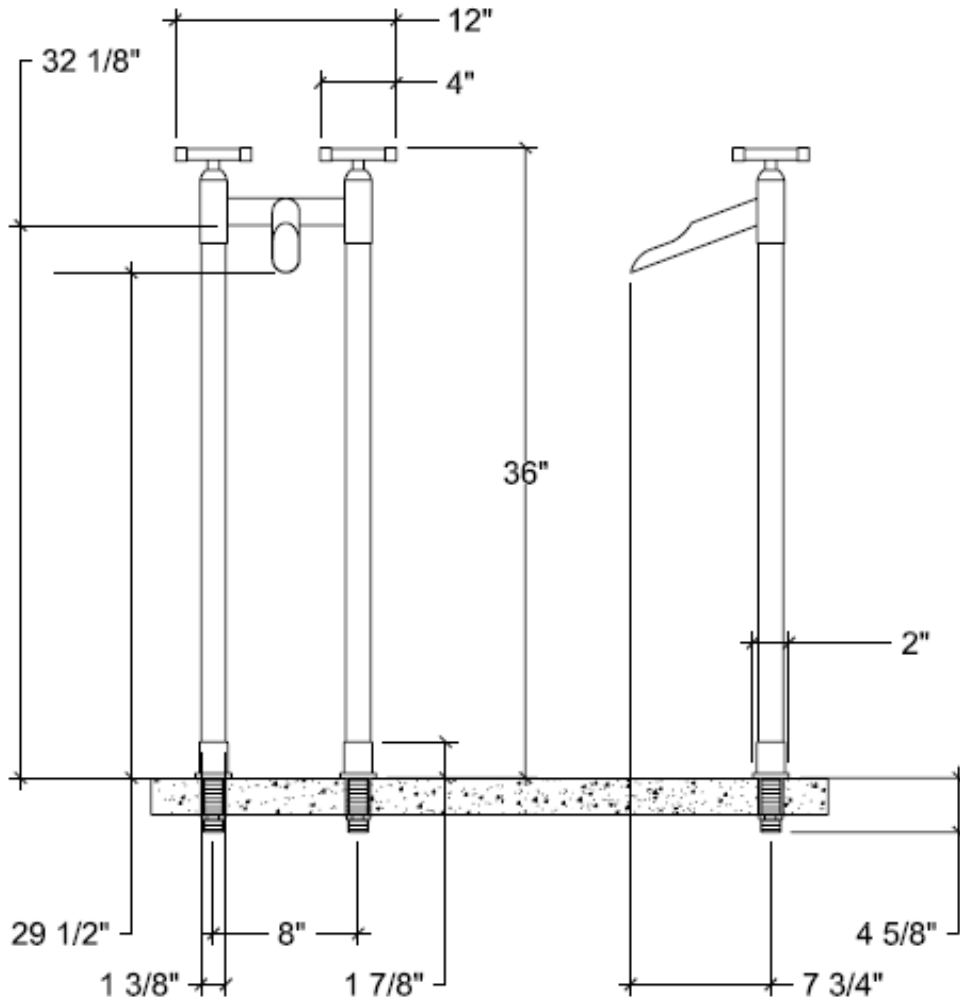

FACTS

3/4" Quarter-turn Ceramic Cartridges, 10 GPM (depending on water pressure)

Legs 8" on center (Leg on hot side is insulated)

Holes should be drilled at 1-1/8" to 1-1/4" (2" Trim rings cover gaps)

Plumber supplies Sweat Adapter (straight or elbow). Rough must be rigid.

3/4" NPS connection for mounting (1" O.D.) – compression fitting

IAPMO Approved

Available in Four Standard Finishes (WaterBridge Collection)

Rustic Copper (RC) Oil Rubbed Bronze (ORB)



Rustic Nickel (RN) Pizzazz Nickel (PN)

Stabilizer Tee available in matching finishes as an accessory.




INSTALLATION DETAILS

WATERBRIDGE ROMAN TUB FILLER – FLOOR MOUNT (WB RTF FM)

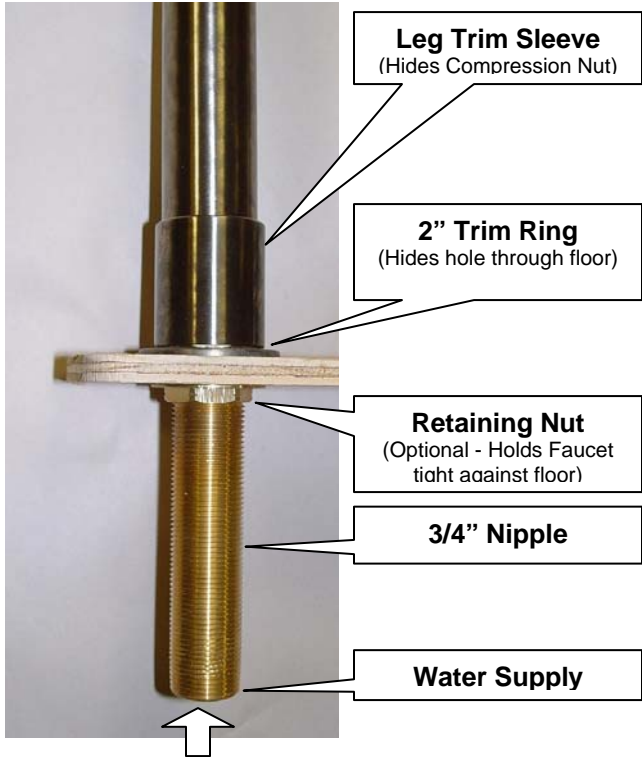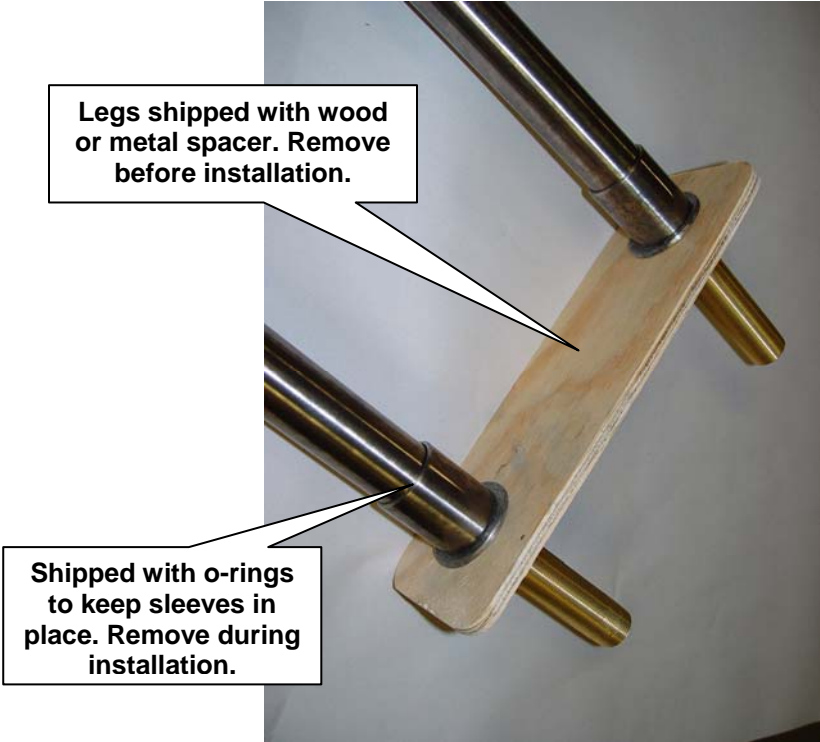

3/4" Nipple should be installed exactly 5/8" above finished floor for optimum compression seal

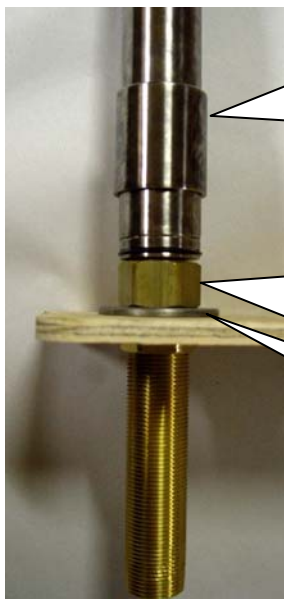

Lift Trim Sleeve to expose compression fitting nut

Tighten down compression fitting locking nut – then slide Trim Sleeve down to hide nut

Trim Ring